

### Standards

NIOSH Approval number:  
Multigas /100 TC-84A-8453  
Multigas TC84A-23C-3485  
ANSI Z87+ Approved

### Weight

Mask + Filter:  
net (S/M) 14.53 oz; (M/L) 14.7 oz  
gross (S/M) 19.43 oz; (M/L) 19.64 oz  
Filter: net 4.05 oz each; both net 8.11 oz, gross 8.92 oz

### Efficiency

At 1000 ppm:  
Cyclohexane (C<sub>6</sub>H<sub>12</sub>) > 70 minutes  
Chlorine (Cl<sub>2</sub>) > 20 minutes  
Hydrogen sulphide (H<sub>2</sub>S) > 40 minutes  
Hydrogen cyanide (HCN) > 25 minutes  
Sulphur dioxide (SO<sub>2</sub>) > 20 minutes  
Ammonia (NH<sub>3</sub>) > 50 minutes

### Shelf Live


3 years (mask & filters) See storage conditions on Instructions for Use.  
Filters are re-usable and changeable.

### Material

- Mask:** Medical grade TPE Conforms to ISO 10993-10: 2010 for irritations. Mask body latex and silicone free, odour free. Valve Body in Nylon, Inhalation/Exhalation diaphragm in Silicone. 4 point adjustable elasticated head and neck strap with comfort pad in TPE.
- Gas Filters:** Activated carbon sealed into a ABS Shell.
- Goggle:** Polycarbonate with flow coating overmolded into soft TPE, permanently attached to the mask body by stainless steel clips.

### Production

United Kingdom  
100% of filters NaCl Tested

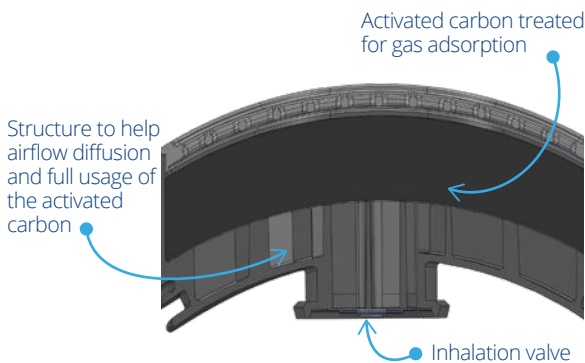

## Applications - Universal gases, dust, mist and fumes

Type	Protection
BLACK	Organic vapors
WHITE	Acid gases
YELLOW	Organic vapors and Acid gases
GREEN	Ammonia and Methylamine
OLIVE	Multi-gas/Vapor

Code	Description	Quantity
SPR630 (S/M) SPR631 (M/L)	Integra Multigas Reusable Half Mask for multiple Gases, Vapor and Dust	4 pcs. per box
SPR483	Integra Multigas Replacement filters	5 sets of 2 pcs. per box
SPM520	Peel off visor x 10	10 sets per box

